

# Hi-MO 9

## LR7-72HYD 625~660M

- Products for utility with optimal power generation through the entire lifecycle
- Performance improvement leads to a more than 6.5% power generation gain
- TaiRay wafer & BC technology enhances high product reliability
- Smart manufacturing & LONGi product lifecycle standards deliver exceptional product quality

12

12-year Warranty for  
Materials and Processing

30

30-year Warranty for Extra  
Linear Power Output

### Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

**LONGi**



**24.4%**  
MAX MODULE  
EFFICIENCY

**0~3%**  
POWER  
TOLERANCE




**<1%**  
FIRST YEAR  
POWER DEGRADATION

**0.35%**  
YEAR 2-30  
POWER DEGRADATION

**BC-CELL**  
LOWER OPERATING  
TEMPERATURE

## Additional Value

### 30-Year Power Warranty

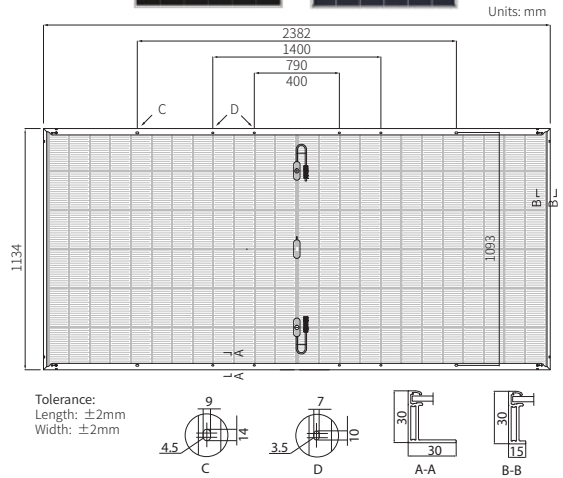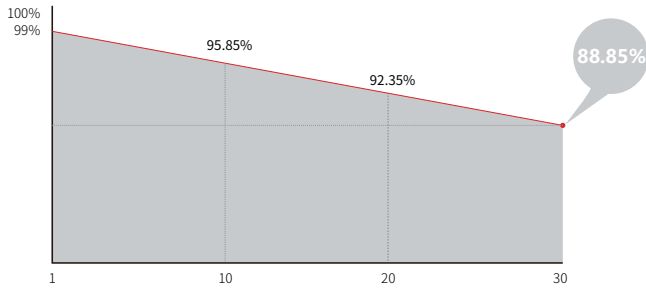

## Mechanical Parameters

|                  |   |
|------------------|---|
| Cell Orientation | 144 (6×24)  |
| Junction Box     | IP68, three diodes  |
| Output Cable     | 4mm <sup>2</sup> , +400, -200mm/±1400mm<br>length can be customized |
| Glass            | Dual glass, 2.0+2.0mm heat strengthened glass                       |
| Frame            | Anodized aluminum alloy frame                                       |
| Weight           | 33.5kg  |
| Dimension        | 2382×1134×30mm  |
| Packaging        | 36pcs per pallet / 144pcs per 20' GP / 720pcs per 40' HC            |

## Electrical Characteristics

STC : AM1.5 1000W/m<sup>2</sup> 25°C

NOCT : AM1.5 800W/m<sup>2</sup> 20°C 1m/s

Test uncertainty for Pmax: ±3%

| Module Type                      | LR7-72HYD-625M |       | LR7-72HYD-630M |       | LR7-72HYD-635M |       | LR7-72HYD-640M |       | LR7-72HYD-645M |       | LR7-72HYD-650M |       | LR7-72HYD-655M |       | LR7-72HYD-660M |       |
|----------------------------------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|
|                                  | STC            | NOCT  | STC            | NOCT  | STC            | NOCT  | STC            | NOCT  | STC            | NOCT  | STC            | NOCT  | STC            | NOCT  | STC            | NOCT  |
| Maximum Power (Pmax/W)           | 625            | 475.8 | 630            | 479.6 | 635            | 483.4 | 640            | 487.2 | 645            | 491.0 | 650            | 494.8 | 655            | 498.6 | 660            | 502.4 |
| Open Circuit Voltage (Voc/V)     | 53.72          | 51.05 | 53.82          | 51.15 | 53.92          | 51.24 | 54.02          | 51.34 | 54.12          | 51.43 | 54.22          | 51.53 | 54.32          | 51.62 | 54.42          | 51.72 |
| Short Circuit Current (Isc/A)    | 14.73          | 11.83 | 14.81          | 11.90 | 14.89          | 11.96 | 14.98          | 12.03 | 15.06          | 12.10 | 15.14          | 12.16 | 15.22          | 12.22 | 15.30          | 12.29 |
| Voltage at Maximum Power (Vmp/V) | 44.37          | 42.17 | 44.47          | 42.26 | 44.57          | 42.36 | 44.67          | 42.45 | 44.77          | 42.55 | 44.87          | 42.64 | 44.97          | 42.74 | 45.07          | 42.83 |
| Current at Maximum Power (Imp/A) | 14.09          | 11.29 | 14.17          | 11.36 | 14.25          | 11.42 | 14.33          | 11.49 | 14.41          | 11.55 | 14.49          | 11.61 | 14.57          | 11.68 | 14.65          | 11.75 |
| Module Efficiency(%)             | 23.1           |       | 23.3           |       | 23.5           |       | 23.7           |       | 23.9           |       | 24.1           |       | 24.2           |       | 24.4           |       |

## Electrical characteristics with different rear side power gain (reference to 645W front)

| Pmax /W | Voc/V | Isc /A | Vmp/V | Imp /A | Pmax gain |
|---------|-------|--------|-------|--------|-----------|
| 677     | 54.12 | 15.81  | 44.77 | 15.13  | 5%        |
| 710     | 54.12 | 16.57  | 44.77 | 15.85  | 10%       |
| 744     | 54.22 | 17.32  | 44.87 | 16.57  | 15%       |
| 776     | 54.22 | 18.07  | 44.87 | 17.29  | 20%       |
| 808     | 54.22 | 18.83  | 44.87 | 18.01  | 25%       |

## Operating Parameters

|                                    |                           |
|------------------------------------|---------------------------|
| Operational Temperature            | -40°C ~ +85°C             |
| Power Output Tolerance             | 0 ~ 3%                    |
| Maximum System Voltage             | DC1500V (IEC/UL)          |
| Maximum Series Fuse Rating         | 30A                       |
| Nominal Operating Cell Temperature | 45±2°C                    |
| Protection Class                   | Class II                  |
| Bifaciality                        | 70±5%                     |
| Fire Rating                        | UL type 29<br>IEC Class C |

## Mechanical Loading

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Front Side Maximum Static Loading | 5400Pa                               |
| Rear Side Maximum Static Loading  | 2400Pa                               |
| Hailstone Test                    | 25mm Hailstone at the speed of 23m/s |

## Temperature Ratings (STC)

|                                 |            |
|---------------------------------|------------|
| Temperature Coefficient of Isc  | +0.050%/°C |
| Temperature Coefficient of Voc  | -0.200%/°C |
| Temperature Coefficient of Pmax | -0.260%/°C |