

12.8V 15Ah LITHIUM BATTERY


► Features

- A grade brand new cylindrical lithium-ion batteries
- > 2000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- Easy installation and maintenance free
- Cell balance function
- ABS Case, corrosion and high temperature resistance
- Certificate: UN38.3, MSDS, IEC62619
- Max 4 battery packs can be connected in series/parallel


► Electrical Characteristics

Model	LFP192WH12.8V-P65L1
Battery Type	LiFePO4
Nominal Voltage (V)	12.8
Nominal Capacity (AH)	15
Energy (WH)	192
Pack Mode	4S3P
Continuous Discharge Current (A)	7.5
Charge Cut-off Voltage (V)	14.4
Discharge Cut-off Voltage (V)	10.4
Max.Charge Current (A)	7.5
Max.Discharge Current (A)	15
Peak Discharge Current (A)	18@2S
Recommend Discharge Current (A)	7.5
Recommend Discharge Depth (%)	80
Cycle Life	> 2000 cycles (25°C, 0.5C) 80% DOD
Communication	---
Display	---
Charge&Discharge Temperature (°C)	Charge: 0°C~+50°C / Discharge: -20°C~+60°C
Optimal Storage Temperature (°C)	5°C ~ +35°C
Recommend Storage Humidity	20%~80%
Terminal	F2
Dimensions (L*W*H) (mm)	152*98*98
Weight (Kg)	1.5±0.5
Transportation	UN38.3 MSDS IEC62619
IP Class	IP65


Different Rate Discharge Curve@25°C

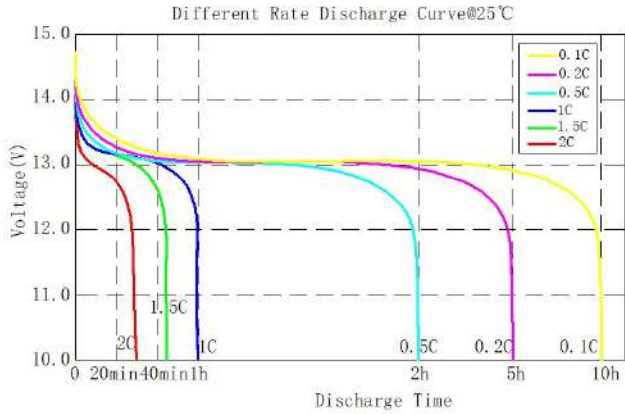


Different Temperature Discharge Curve@0.5C

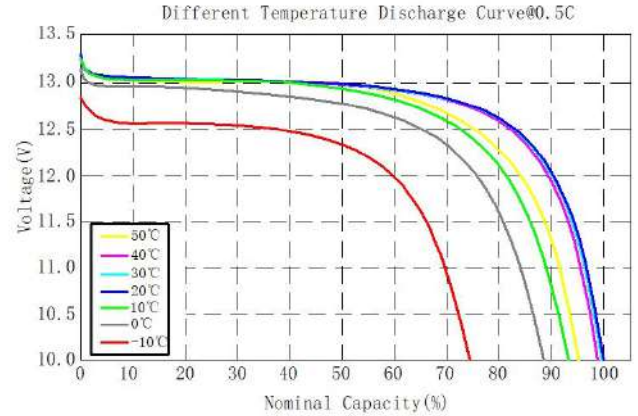


State of Charge Curve@0.5C 25°C

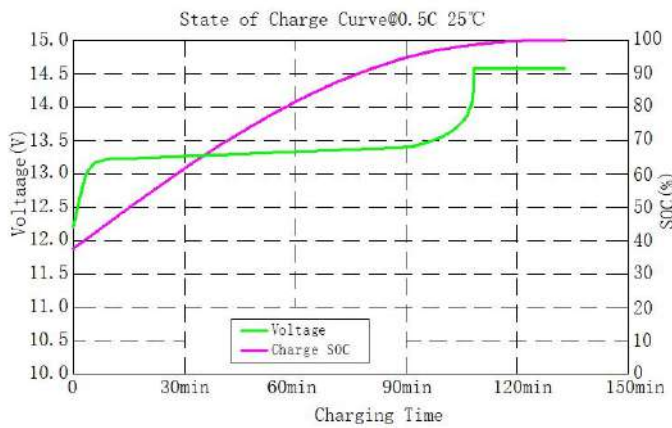

Charging Characteristics@0.5C 25°C

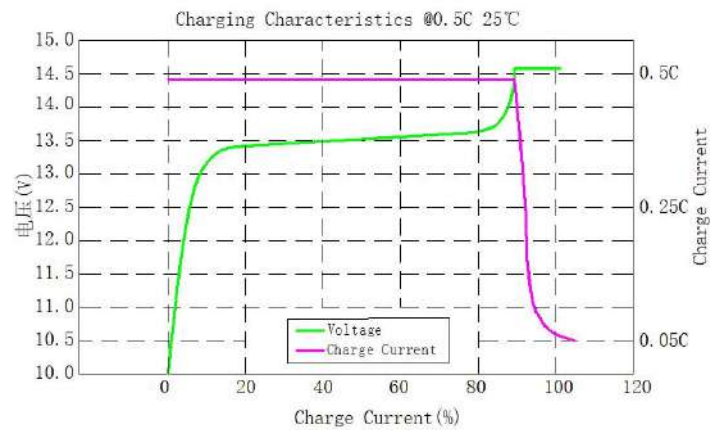

Different DOD Discharge Cycle Life Curve@0.5C 25°C

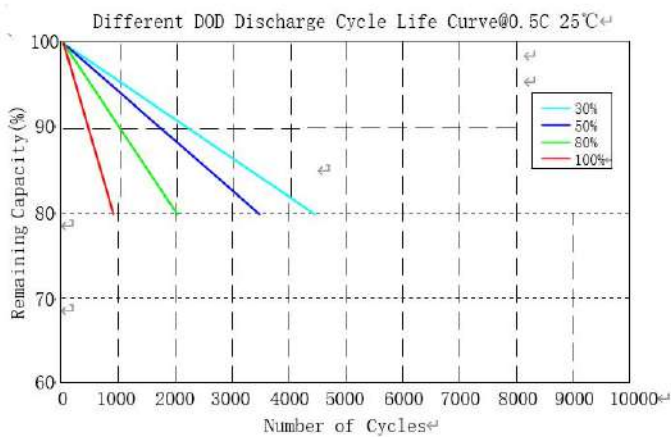

Different Temperature Self Discharge Curve

